arXiv:1202.2576v2 [cs.IT] 14 Feb 2012

New Results on the Sum of Gamma Random Variates With Application to the Performance of Wireless Communication Systems over Nakagami-*m* Fading Channels

Imran Shafique Ansari, *Student Member, IEEE*, Ferkan Yilmaz, *Member, IEEE*,
Mohamed-Slim Alouini, *Fellow, IEEE*, and Oğuz Kucur, *Member, IEEE*

***Abstract*—The probability density function (PDF) and cumulative distribution function of the sum of L independent but not necessarily identically distributed gamma variates, applicable to the output statistics of maximal ratio combining (MRC) receiver operating over Nakagami-m fading channels or in other words to the statistical analysis of the scenario where the sum of squared Nakagami-m distributions are user-of-interest, is presented in closed-form in terms of well-known Meijer's G function and easily computable Fox's H function for integer valued and non-integer valued diversity orders (i.e., m fading parameter of Nakagami fading environment), respectively. Further analysis, particularly on bit error rate via PDF-based approach, too is represented in closed form in terms of Meijer's G function and Fox's H function for integer valued diversity orders, and extended Fox's H function ($\hat{H}$) for non-integer valued diversity orders. The proposed results complement previous elegant results that are either evolved in closed-form, or expressed in terms of infinite sums or higher order derivatives of the diversity order m.**

***Index Terms*—Gamma variates, cellular mobile radio systems, non-integer parameters, diversity, maximal ratio combining, binary modulation schemes, bit error rate, Fox's H function, Meijer's G function, Fox's H function, and extended Fox's H function.**

I. INTRODUCTION

In recent times, different diversity schemes have marked an important impact in the arena of wireless communication systems. The main reason behind this is that these different diversity schemes allow for multiple transmission and/or reception paths for the same signal [1]. One of the optimal diversity combining scheme is the maximal ratio combining (MRC) diversity scheme where all the diversity branches are processed to obtain the best possible devised and improved single output that possibly stays above a certain specified threshold [1]–[3].

Additionally, wireless communications are driven by a complicated phenomenon known as radio-wave propagation that is characterized by various effects such as fading, shadowing and path-loss. The statistical behavior of these effects is described by different models depending on the nature of the communication environment. The wide versatility, experimental validity, and analytical tractability of Nakagami-*m* distribution [4] has made it a very popular fading model for performance analysis investigations in diversity schemes of wireless communications (for instance, [5] among others and [6] and references therein). In addition, it is useful to mention that Nakagami-*m* distribution is useful to study multihop relay networks [7], [8]. Hence, this and such other distributions have many other applications in wireless communication engineering problems and one of those that we focus on is a communication system employing MRC diversity scheme undergoing this distribution i.e. the study of MRC diversity combining receiver operating over Nakagami-*m* fading channels [4], where the statistics of the sum of gamma random variates (RVs) or equivalently the sum of squared Nakagami-*m* RVs are required and moreover, the performance analysis of such wireless communication systems usually requires complicated and tedious tasks related to statistics as elegantly explained in details in [9].

The probability density function (PDF) and cumulative distribution function (CDF) of the sum of L independent but not necessarily identical (i.n.i.d.) gamma RVs has been elegantly investigated quite a couple of times earlier in [6], [9]–[11] but the published results are sometimes given in rather complicated expressions in the form of single definite or indefinite series that renders the given expressions therein highly intractable or they have been derived via moment-generating function (MGF)-based approach. In more details, Moschopoulos has proposed in [11] an infinite-series representation for the PDF of the sum of the i.n.i.d. gamma RVs and Alouini *et. al* have extended the results of [11] in [6] for the case of arbitrarily correlated gamma RVs and studied the performance of MRC among other receivers. Commonly, the MGF-based approach or characteristic function (CF)-based approach have been followed for the performance analysis and derived analytical results in terms of either infinite sums and/or higher order derivatives of the diversity order [12]–[16]. This occurs as there are no simple closed-form expressions available in the open literature either for the PDF or the CDF of the sum of i.n.i.d. gamma RVs [9]. Recently, Karagiannidis *et. al* have obtained in [9] closed-form expressions for the PDF and the CDF of the sum of nonidentical squared Nakgami-*m* RVs or equivalently gamma RVs with integer-order fading

Imran Shafique Ansari, Ferkan Yilmaz and Mohamed-Slim Alouini are with King Abdullah University of Science and Technology (KAUST), Al-Khawarizmi Applied Math. Building (Bldg. #1), Thuwal 23955-6900, Makkah Province, Kingdom of Saudi Arabia (e-mail: {imran.ansari, ferkan.yilmaz, slim.alouini}@kaust.edu.sa).

Oğuz Kucur is with Gebze Institute of Technology (GYTE), P.K 141, 41400, Gebze, Kocaeli, Turkey (e-mail: okucur@gyte.edu.tr).

parameters but these results involve infinite series summations.

In this work, we offer novel closed-form expressions for the PDF and CDF of the sum of i.n.i.d. gamma RVs or equivalently squared Nakagami-*m* RVs with integer-order as well as non-integer-order fading parameters in terms of Meijer's G function [17] and Fox's H function [18]–[20, App. (A.5)] respectively. It is noteworthy to mention that the bit error rate (BER) is one of the most important performance measures that forms the basis in designing wireless communication systems. Hence, we demonstrate closed-form expressions of the BER, as a performance metric, for binary modulation schemes, via PDF-based approach, of a *L*-branch MRC diversity receiver in the presence of gamma or Nakagami-*m* multipath fading, in terms of Meijer's G function and Fox's H function for integer-order fading parameters, and in terms of extended Fox's H function ($\hat{H}$) (defined in (T.I.1) of Table I) for non-integer-order fading parameters. This proves the importance and the simplicity in the employment of those earlier derived simple closed-form statistical PDF and CDF expressions. These resulting easy-to-evaluate expressions also give an alternative form for previously known/published results obtained via CF or MGF-based approaches. It should be noted that all our newly proposed results are readily computable by Mellin-Barnes theorem that further corroborates the generality and the usefulness of the analytical frameworks introduced in this paper. These have been checked and validated by Monte Carlo simulations.

The remainder of the paper is organized as follows. Section II introduces the system and Section III gives novel closed-form expressions for the PDF and CDF of the sum of gamma or equivalently squared Nakagami-*m* RVs in terms of Meijer's G function and Fox's H function respectively for integer-order and non-integer-order fading parameters respectively. Next, Section IV utilizes these results presented in Section III to derive useful expressions for the BER, as a performance metric for MRC diversity receivers operating over i.n.i.d. gamma fading channels or equivalently Nakagami-*m* diversity paths in terms of Meijer's G function and Fox's H function for integer-order fading parameters, and extended Fox's H function ($\hat{H}$) for non-integer-order fading parameters. And finally, Section V discusses the results followed by the summary of the paper in the last section.

II. Nakagami-m Channel Model and Gamma Distribution

A MRC based communication system with a source and a destination is considered with L diversity paths undergoing i.n.i.d. Nakagami-*m* fading channels as follows

$$Y = \alpha X + n, \tag{1}$$

where Y is the received signal at the receiver end, X is the transmitted signal, α is the channel gain, and n is the additive white Gaussian noise (AWGN). In a Nakagami-*m* multipath fading channel, $\gamma = |\alpha|^2$ follows gamma distribution. Hence, the channel gains experience multipath fading whose statistics follows gamma distribution whose PDF is given by

$$p_\gamma(\gamma) = \left(\frac{m}{\Omega}\right)^m \frac{\gamma^{m-1}}{\Gamma(m)} \, \exp\left(-\frac{m}{\Omega}\,\gamma\right), \tag{2}$$

where $m > 0$ and $\Omega > 0$ are known as fading figure representing the diversity order of the fading environment and the mean of the local power, respectively, and where $\Gamma(\cdot)$ denotes the Gamma function [21, Eq. (8.310)]. In more details, the parameter m quantifies the severity of multipath fading, in the sense that small values of m indicates severe multipath fading and vice versa. The instantaneous SNR of the lth branch is given by $\gamma_l = (E_b/N_0)\, {x_l}^2$ where x_l is the envelope of the received signal for the lth branch, E_b is the average energy per bit and N_0 is the power spectral density of the AWGN.

III. Closed-Form Statistical Characteristics for the Sum of Gamma Random Variates

This section presents the results on the statistical characteristics including the PDF and CDF of the sum of i.n.i.d. gamma variates. To best of the author's knowledge, it is useful to mention again that the PDF of the sum of gamma distributions given in the following theorem is a novel closed-form result not reported in the literature earlier. It includes special cases that are used in the literature such as independent and identically distributed (i.i.d.) gamma RVs and/or integer-fading figure parameters among others [6], [9].

Theorem 1 (PDF of the sum of gamma or equivalently squared Nakagami-*m* RVs)**.** *Let* $\{\gamma_l\}_{l=1}^{L}$ *be a set of i.n.i.d. gamma variates with parameters* m_l *and* Ω_l*. Then, the closed-form PDF*[1] *of the sum*

$$Y = \sum_{l=1}^{L} \gamma_l \tag{3}$$

for both integer-order as well as non-integer-order fading parameters can be expressed in terms of Fox H-function as

$$p_Y(y) = \prod_{l=1}^{L} \left(\frac{m_l}{\Omega_l}\right)^{m_l} \bar{\mathrm{H}}^{0,L}_{L,L}\left[\exp(y) \,\middle|\, \begin{matrix} \Xi_L^{(1)} \\ \Xi_L^{(2)} \end{matrix}\right], \tag{4}$$

where $y > 0$*, the coefficient sets* $\Xi_k^{(1)}$ *and* $\Xi_k^{(2)}$*,* $k \in \mathbb{N}$ *are defined as*

$$\Xi_k^{(1)} = \overbrace{\left(1 - \frac{m_1}{\Omega_1}, 1, m_1\right), \ldots, \left(1 - \frac{m_k}{\Omega_k}, 1, m_k\right)}^{k\text{-bracketed terms}}, \tag{5}$$

and

$$\Xi_k^{(2)} = \overbrace{\left(-\frac{m_1}{\Omega_1}, 1, m_1\right), \ldots, \left(-\frac{m_k}{\Omega_k}, 1, m_k\right)}^{k\text{-bracketed terms}} \tag{6}$$

respectively.

---

[1] For correlated diversity branches, the statistical characteristics derivation and the performance analysis can be carried out in a similar fashion as independent fading case. For an arbitrarily correlated Nakagami-*m* fading environment, assuming that the fading parameter is common to all the diversity branches, the desired MGF of the sum of correlated gamma RVs can be expressed as $\mathcal{M}_Y(s) = \det(I + sR\Lambda)^{-m} = \prod_{l=1}^{L} \mathcal{M}_{\gamma_l}(s) = \prod_{l=1}^{L} (1 + \lambda_l\ s)^{-m}$ where I is the $L \times L$ identity matrix. Λ is a positive definite matrix of dimension L (determined by the branch covariance matrix), R is a diagonal matrix as $R = \mathrm{diag}(\Omega_1/m, \ldots, \Omega_L/m)$, and λ_l is the l^{th} eigenvalue of matrix $R\Lambda$ where each eigenvalue is modeled as a gamma RV. Hence, on replacing γ_l's with λ_l's, in our presented work, we will achieve the results applicable to correlated diversity case.

TABLE I

REPRESENTATION OF THE EXTENDED FOX'S $\bar{\text{H}}$ FUNCTION ($\hat{H}$) AND ITS SPECIAL CASES

:

The extended Fox's $\bar{\text{H}}$ function ($\hat{H}$) is defined as

$$\hat{\text{H}}^{m,n}_{p,q}\left[z\left|\begin{matrix}(\alpha_j,A_j,a_j)_{1,p}\\(\beta_j,B_j,b_j)_{1,q}\end{matrix}\right.\right]=\frac{1}{2\pi i}\oint_C\frac{\prod_{j=1}^{n}\{\Gamma(1-\alpha_j+A_js)\}^{a_j}\prod_{j=1}^{m}\{\Gamma(\beta_j-B_js)\}^{b_j}}{\prod_{j=n+1}^{p}\{\Gamma(\alpha_j-A_js)\}^{a_j}\prod_{j=m+1}^{q}\{\Gamma(1-\beta_j+B_js)\}^{b_j}}z^s ds, \qquad \text{(T.I.1)}$$

which contains fractional powers of Γ-functions. Here z may be real or complex but is not equal to zero and an empty product is interpreted as unity; C is a suitable contour, and positive integers p, q, m, and n satisfy the following inequalities: $1 \leq m \leq q$, $0 \leq n \leq p$, $A_j > 0 (j = 1, \ldots, p)$, $B_j > 0 (j = 1, \ldots, q)$ and $\alpha_j (j = 1, \ldots, p)$, and $\beta_j (j = 1, \ldots, q)$ are complex parameters. The exponents $a_j (j = 1, \ldots, p)$ and $b_j (j = 1, \ldots, q)$ can take on non-integer values. The poles of this integrand are assumed to be simple and the contour in this definition is presumed to be imaginary axis Re(s)=0 that is suitably intended in order to avoid the singularities of the gamma functions and to keep these singularities at appropriate sides.

When the exponents $a_j = 1$ for $(j = n + 1, \ldots, p)$ and $b_j = 1$ for $(j = 1, \ldots, m)$, the extended Fox's $\bar{\text{H}}$ function ($\hat{H}$) reduces to the familiar Fox's $\bar{\text{H}}$ function defined by [18]–[20] as

$$\bar{\text{H}}^{m,n}_{p,q}\left[z\left|\begin{matrix}(\alpha_j,A_j,a_j)_{1,n},(\alpha_j,A_j)_{n+1,p}\\(\beta_j,B_j)_{1,m},(\beta_j,B_j,b_j)_{m+1,q}\end{matrix}\right.\right]=\frac{1}{2\pi i}\oint_C\frac{\prod_{j=1}^{n}\{\Gamma(1-\alpha_j+A_js)\}^{a_j}\prod_{j=1}^{m}\Gamma(\beta_j-B_js)}{\prod_{j=n+1}^{p}\Gamma(\alpha_j-A_js)\prod_{j=m+1}^{q}\{\Gamma(1-\beta_j+B_js)\}^{b_j}}z^s ds, \qquad \text{(T.I.2)}$$

which contains fractional powers of Γ-functions. Here z may be real or complex but is not equal to zero and an empty product is interpreted as unity; C is a suitable contour, and positive integers p, q, m, and n satisfy the following inequalities: $1 \leq m \leq q$, $0 \leq n \leq p$, $A_j > 0 (j = 1, \ldots, p)$, $B_j > 0 (j = 1, \ldots, q)$ and $\alpha_j (j = 1, \ldots, p)$, and $\beta_j (j = 1, \ldots, q)$ are complex parameters. The exponents $a_j (j = 1, \ldots, n)$ and $b_j (j = m + 1, \ldots, q)$ can take on non-integer values. The poles of this integrand are assumed to be simple and the contour in this definition is presumed to be imaginary axis Re(s)=0 that is suitably intended in order to avoid the singularities of the gamma functions and to keep these singularities at appropriate sides.

Now, when the exponents $a_j = b_j = 1 \forall j$, the Fox's $\bar{\text{H}}$ function reduces to the familiar Fox *H*-function defined by [17] as

$$\text{H}^{m,n}_{p,q}\left[z\left|\begin{matrix}(\alpha_1,A_1),\ldots,(\alpha_p,A_p)\\(\beta_1,B_1),\ldots,(\beta_q,B_q)\end{matrix}\right.\right]=\frac{1}{2\pi i}\oint_C\frac{\prod_{j=1}^{n}\Gamma(1-\alpha_j+A_js)\prod_{j=1}^{m}\Gamma(\beta_j-B_js)}{\prod_{j=n+1}^{p}\Gamma(\alpha_j-A_js)\prod_{j=m+1}^{q}\Gamma(1-\beta_j+B_js)}z^s ds, \qquad \text{(T.I.3)}$$

which contains fractional powers of Γ-functions. Here z may be real or complex but is not equal to zero and an empty product is interpreted as unity; C is a suitable contour, and positive integers p, q, m, and n satisfy the following inequalities: $1 \leq m \leq q$, $0 \leq n \leq p$, $A_j > 0 (j = 1, \ldots, p)$, $B_j > 0 (j = 1, \ldots, q)$ and $\alpha_j (j = 1, \ldots, p)$, and $\beta_j (j = 1, \ldots, q)$ are complex parameters. The poles of this integrand are assumed to be simple and the contour in this definition is presumed to be imaginary axis Re(s)=0 that is suitably intended in order to avoid the singularities of the gamma functions and to keep these singularities at appropriate sides.

Finally, when the exponents $\alpha_j = \beta_j = 1 \forall j$, the Fox's $\bar{\text{H}}$ function reduces to the familiar Meijer's G function defined by [17] as

$$\text{G}^{m,n}_{p,q}\left[z\left|\begin{matrix}\alpha_1,\ldots,\alpha_p\\\beta_1,\ldots,\beta_q\end{matrix}\right.\right]=\frac{1}{2\pi i}\oint_C\frac{\prod_{j=1}^{n}\Gamma(1-\alpha_j+s)\prod_{j=1}^{m}\Gamma(\beta_j-s)}{\prod_{j=n+1}^{p}\Gamma(\alpha_j-s)\prod_{j=m+1}^{q}\Gamma(1-\beta_j+s)}z^s ds, \qquad \text{(T.I.4)}$$

which contains fractional powers of Γ-functions. Here z may be real or complex but is not equal to zero and an empty product is interpreted as unity; C is a suitable contour, and positive integers p, q, m, and n satisfy the following inequalities: $1 \leq m \leq q$, and $0 \leq n \leq p$. $\alpha_j (j = 1, \ldots, p)$, and $\beta_j (j = 1, \ldots, q)$ are complex parameters. The poles of this integrand are assumed to be simple and the contour in this definition is presumed to be imaginary axis Re(s)=0 that is suitably intended in order to avoid the singularities of the gamma functions and to keep these singularities at appropriate sides.

Proof: In order to derive the PDF of Y, we proceed as follows. Firstly, the MGF

$$\mathcal{M}_\gamma(s) \triangleq \mathbb{E}\left[\exp(-\gamma s)\right] = \int_0^\infty \exp(-\gamma s) p_\gamma(\gamma) d\gamma \qquad (7)$$

of a single gamma distribution is given as [1, Eq. (2.22)]

$$\mathcal{M}_\gamma(s) = \left(1 + \frac{\Omega}{m}s\right)^{-m}. \qquad (8)$$

Then, after performing some simple algebraic manipulations using [22, Eq. (6.1.15)], we can rewrite the MGF of a single gamma distribution as

$$\mathcal{M}_\gamma(s) = \left(\frac{m}{\Omega}\right)^m \frac{\Gamma^m\left(\frac{m}{\Omega}+s\right)}{\Gamma^m\left(1+\frac{m}{\Omega}+s\right)}. \qquad (9)$$

Since, $\gamma_l's$ are independent, the MGF of Y is the product of the MGF's of the $\gamma_l's$, i.e.

$$\mathcal{M}_Y(s) = \prod_{l=1}^{L} \mathcal{M}_{\gamma_l}(s). \qquad (10)$$

Now, we express the PDF of the sum of gamma RVs, using the obtained MGF in (10), via inverse Laplace transform [23]

$$p_Y(y) = \mathcal{L}^{-1}\{\mathcal{M}(s)\} = \frac{1}{2\pi i}\oint_C \mathcal{M}_Y(s)\exp(s)ds \qquad (11)$$

that produces a Mellin-Barnes contour integral [24] representation as (similar to (T.I.1), Table I)

$$p_Y(y) = \prod_{l=1}^{L}\left(\frac{m_l}{\Omega_l}\right)^{m_l} \times \frac{1}{2\pi i}\oint_C \frac{\prod_{l=1}^{L}\Gamma^{m_l}\left(\frac{m_l}{\Omega_l}+s\right)}{\prod_{l=1}^{L}\Gamma^{m_l}\left(1+\frac{m_l}{\Omega_l}+s\right)}\exp(s)ds. \qquad (12)$$

Hence we use this obtained result and perform some simple rearrangements on the $\Gamma(.)$ terms in the Mellin-Barnes contour integral representation to express the closed-form PDF of the sum of gamma RVs Y, valid for both integer-order as well as non-integer-order fading parameters, in terms of Fox's $\bar{\text{H}}$ function as given in (4). ■

The motivation and possibility that led to the above result presented in Theorem 1 was the representation of the PDF a single gamma RV in terms of Meijer's G function as discussed below in Corollary 1.

Corollary 1 (PDF of a single gamma RV)**.** *Let $\{\gamma_l\}$ be any i.n.i.d. gamma variate with parameters m_l and Ω_l. Then, the closed-form PDF of this single gamma RV can be expressed as*

$$p_{\gamma_l}(\gamma_l) = \left(\frac{m_l}{\Omega_l}\right)^{m_l} \mathrm{G}^{m_l,0}_{m_l,m_l}\left[\exp(-\gamma_l)\,\middle|\, \begin{matrix}\Phi^{(1)}_{m_l}\\ \Phi^{(2)}_{m_l}\end{matrix}\right], \tag{13}$$

where the coefficient sets $\Phi^{(1)}_k$ and $\Phi^{(2)}_k$, $k \in \mathbb{N}$ are defined as

$$\Phi^{(1)}_k = \overbrace{\left(1+\frac{m_k}{\Omega_k}\right),\ldots,\left(1+\frac{m_k}{\Omega_k}\right)}^{k\text{-times}}, \tag{14}$$

and

$$\Phi^{(2)}_k = \overbrace{\left(\frac{m_k}{\Omega_k}\right),\ldots,\left(\frac{m_k}{\Omega_k}\right)}^{k\text{-times}} \tag{15}$$

respectively.

Proof: The PDF of a single gamma RV can be expressed using the obtained MGF in (9), via inverse Laplace transform [23] that produces a Mellin-Barnes integral [24] representation. Hence we use this obtained result to express the PDF of a single gamma RV in an alternative form, in terms of Meijer's G function, as expressed in (13) ■

To our best knowledge, the Fox's $\bar{\mathrm{H}}$ function is not available in any standard mathematical packages. As such, we offer in Table II an efficient Mathematica® implementation of this function (similar to [7], [25], [26]) in order to give numerical results based on (4). With this implementation, the Fox's $\bar{\mathrm{H}}$ function can be evaluated fast and accurately. This computability, therefore, has been utilized for different scenarios and is employed to discuss the results in comparison to respective Monte Carlo simulation outcomes.

Fig. 1 and Fig. 2 present the PDF and the logarithmic PDF respectively of the output SNR obtained from the exact closed-form expression (4) and show a perfect match between this obtained closed-form analytical result and the one obtained via Monte Carlo simulations for varying $L's$ (i.e. $L = 3, 4, 5$), and their respective fixed fading parameters $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$.

For additional verification purposes, we simplified the PDF expression presented in [9, Theorem 1, Eq. (6)] for the sum of squared Nakagami-*m* or equivalently gamma RVs, for a special case with $L = 2$ i.e. a dual-branch MRC diversity combining receiver based wireless communication system undergoing Rayleigh fading i.e. $m_1 = 1$ and $m_2 = 1$. We obtained the following simplified PDF expression.

$$f_{Z_L}(z) = \frac{1}{\eta_1 - \eta_2}\left[\exp\left(-\frac{z}{\eta_1}\right) - \exp\left(-\frac{z}{\eta_2}\right)\right], \tag{16}$$

where, $\eta_l's$ are equivalent to our $\Omega_l's$ and z is the RV as opposed to our RV y. This obtained expression, when plotted against our results, with similar specific values, found a perfect match along with the Monte Carlo simulations and hence further conforming our results as shown in Fig. 3.

TABLE II
MATHEMATICA® IMPLEMENTATION OF FOX'S $\bar{\mathrm{H}}$ FUNCTION

```
(*Fox H-Bar-Function Implementation*)
Clear[x, Ω];
(*Exception*)
FoxHBar::InconsistentCoeffs = "Inconsistent coefficients!";
FoxHBar[a_, b_, z_] := Module[
   {Z, s, Pa, Pb, Qa, Qb, M, R, value},
   (*Gamma product terms*)
   Pa = Function[u, Product[
      Power[Gamma[1 - a[[1, n, 1]] + u a[[1, n, 2]]], a[[1, n, 3]]], {n, 1, Length[a[[1]]]}]];
   Qa = Function[u, Product[Gamma[a[[2, n, 1]] -  u a[[2, n, 2]]], {n, 1, Length[a[[2]]]}]];
   Pb = Function[u, Product[Gamma[b[[1, n, 1]] - u b[[1, n, 2]]], {n, 1, Length[b[[1]]]}]];
   Qb = Function[u, Product[
      Power[Gamma[1 - b[[2, n, 1]] + u b[[2, n, 2]]], b[[2, n, 3]]], {n, 1, Length[b[[2]]]}]];
   M = Function[u,  Pa[u] Pb[u] / Qa[u] / Qb[u]];
   (*Contour Limiter*)
   (*Depends on numerator argument i.e. it
    must be at least half of the least valued gamma arguments*)
   R = -1;
   (*Assignment and Declaration*)
   Z = z;
   (*Final Evaluation*)
             1
   value = -----
           2 π I
     NIntegrate[M[s] Z^s, {s, -50 - I 100, R - I 100, R + I 100, -50 + I 100}, MaxRecursion → 55];
   (*Returning back the value*)
   Return[value];
  ];
(*End of FoxHBar*)
```

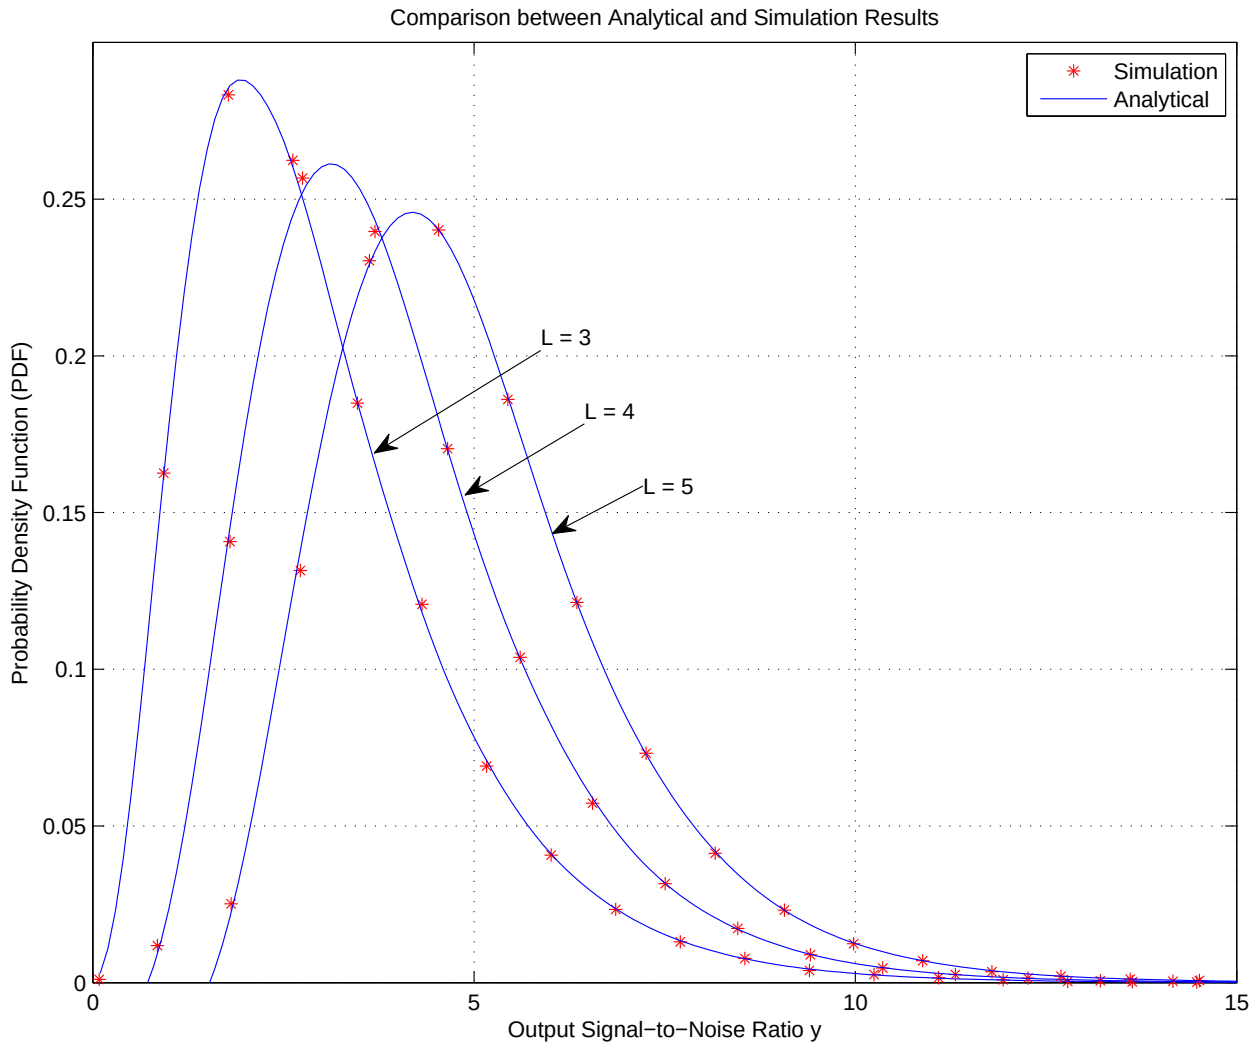

Fig. 1. Comparison between PDFs obtained analytically and via Monte Carlo simulations for varying branches L and respective fixed fading parameters for these channels as $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$.

Corollary 2 (PDF of the sum of gamma or equivalently squared Nakagami-*m* RVs for integer-order fading parameters)**.** *It is worth mentioning that the closed-form expression in* (4) *simplifies to the following expression* (18) *for integer-order fading parameters via simple algebraic manipulations.*

$$p_Y(y) = \prod_{l=1}^{L}\left(\frac{m_l}{\Omega_l}\right)^{m_l} \mathrm{G}^{\kappa,0}_{\kappa,\kappa}\left[\exp(-y)\,\middle|\, \begin{matrix}\Psi^{(1)}_{\kappa}\\ \Psi^{(2)}_{\kappa}\end{matrix}\right], \tag{18}$$

$$\Psi_k^{(1)} = \overbrace{\overbrace{\left(1+\frac{m_1}{\Omega_1}\right),\ldots,\left(1+\frac{m_1}{\Omega_1}\right)}^{m_1\text{-times}},\ldots,\overbrace{\left(1+\frac{m_K}{\Omega_K}\right),\ldots,\left(1+\frac{m_K}{\Omega_K}\right)}^{m_K\text{-times}}}^{k\text{-bracketed terms}} \tag{17}$$

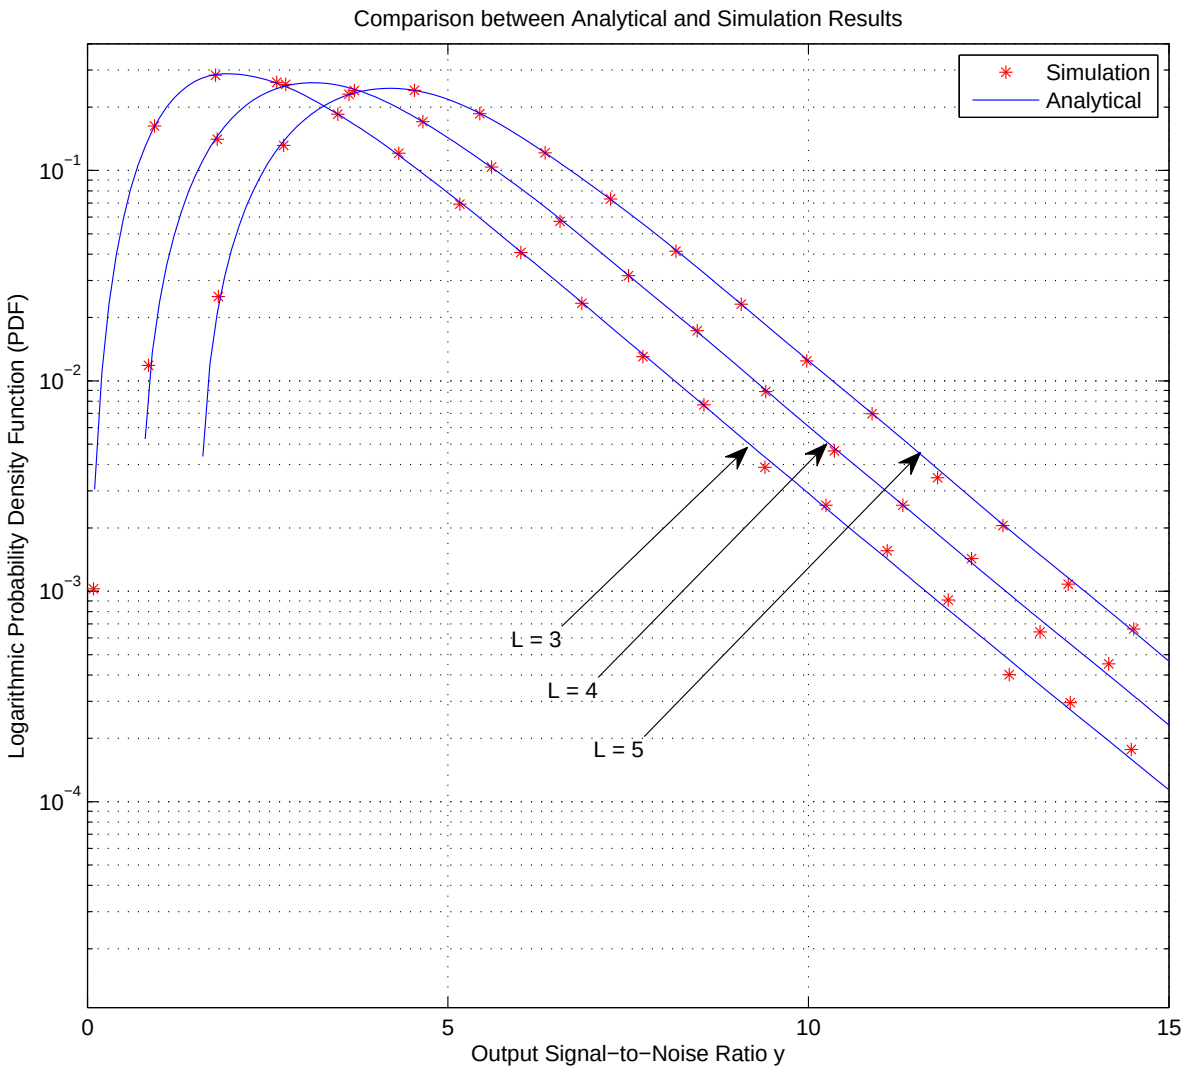

Fig. 2. Comparison between PDFs obtained analytically and via Monte Carlo simulations, on log scale, for varying branches L and respective fixed fading parameters for these channels as $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$.

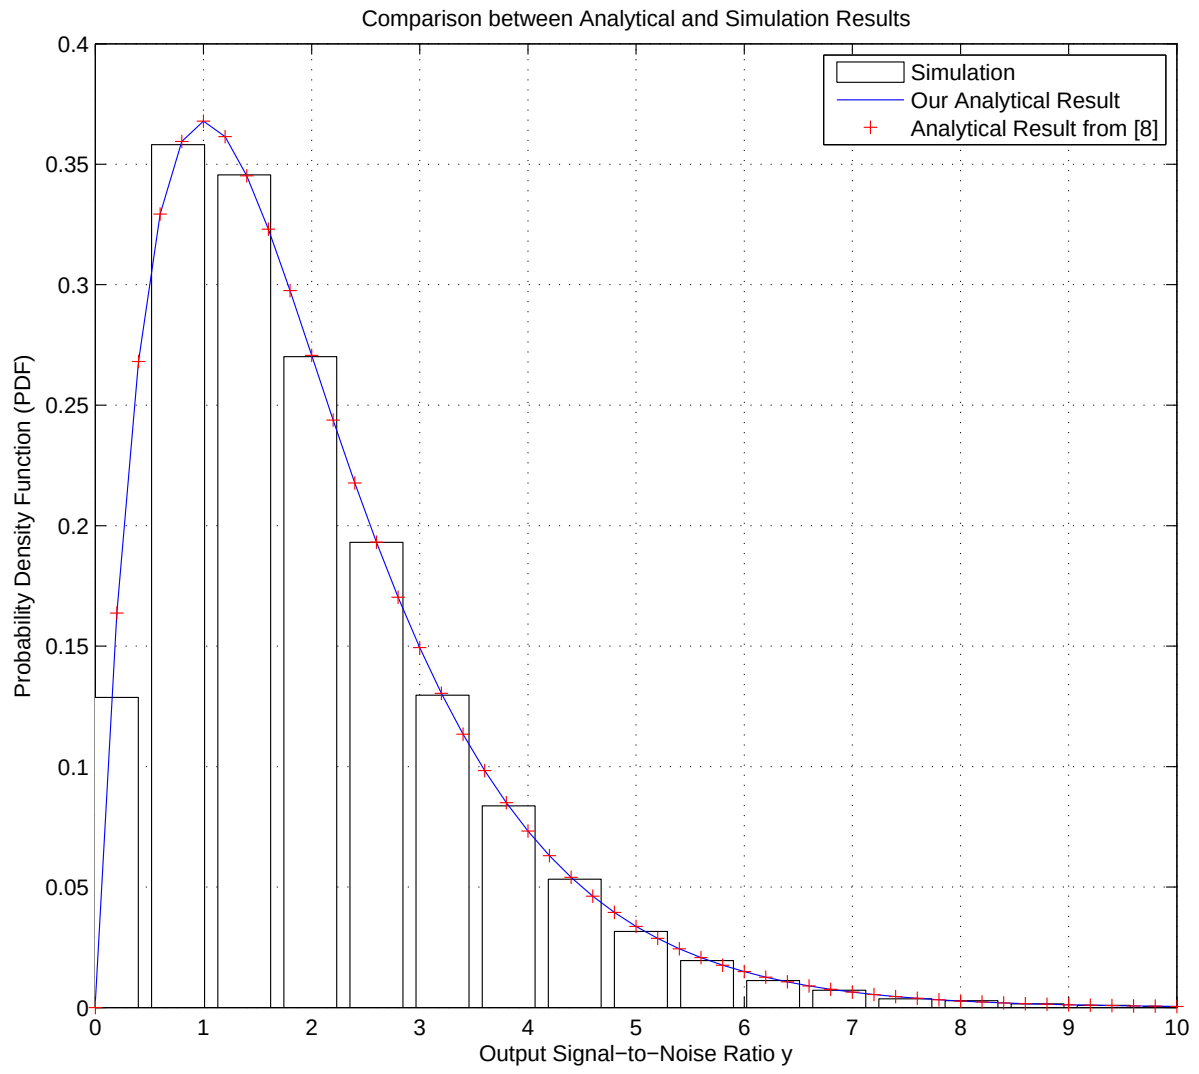

Fig. 3. Comparison between PDFs obtained analytically, via Monte Carlo simulations, and via [9, Theorem 1, Eq. (6)] with $L = 2$ and fading parameters for these channels as $m_1 = 1$ and $m_2 = 1$ i.e. Rayleigh fading channels.

where,

$$\kappa = \sum_{l=1}^{L} m_l \tag{19}$$

is an integer, the coefficient set $\Psi_k^{(1)}$, $k \in \mathbb{N}$ *is as defined in* (17) *and the coefficient set* $\Psi_k^{(2)}$, $k \in \mathbb{N}$ *is defined as*

$$\Psi_k^{(2)} = \overbrace{\overbrace{\left(\frac{m_1}{\Omega_1}\right),\ldots,\left(\frac{m_1}{\Omega_1}\right)}^{m_1\text{-times}},\ldots,\overbrace{\left(\frac{m_K}{\Omega_K}\right),\ldots,\left(\frac{m_K}{\Omega_K}\right)}^{m_K\text{-times}}}^{k\text{-bracketed terms}}, \tag{20}$$

where K *is the total number of gamma or equivalently squared Nakagami-m RVs i.e.* L *number of total branches for our specific wireless communication system being considered here.*

Now let us consider some special cases in order to check the correctness and accuracy of (18). These special cases give a further insight to the above obtained results and assist in understanding the rest of the results presented in this work.

Special Case 1 (Sum of two exponential RVs)**.** Let us assume that we have two i.n.i.d. gamma RVs with fading figures $m_1 = 1$ and $m_2 = 1$ and average powers Ω_1 and Ω_2. Substituting these parameters in (18) results in

$$p_Y(y) = \frac{1}{\Omega_1\Omega_2} \mathrm{G}_{2,2}^{2,0}\left[\exp(-y) \,\middle|\, \begin{matrix} 1+\frac{1}{\Omega_1}, 1+\frac{1}{\Omega_2} \\ \frac{1}{\Omega_1}, \frac{1}{\Omega_2} \end{matrix}\right]. \tag{21}$$

Then, using the Meijer's G identity given in [20, Eq. (1.142)] and then using [27, Eq. (07.23.03.0227.01)], (21) readily reduces to [28, Sec. 5.2.4]

$$p_Y(y) = \frac{\exp(-\frac{y}{\Omega_1}) - \exp(-\frac{y}{\Omega_2})}{\Omega_1 - \Omega_2}. \tag{22}$$

Special Case 2 (Sum of L exponential RVs)**.** Let us assume that we have L i.n.i.d. gamma RVs with fading figures $m_l = 1$ for all $l \in \{1, 2, 3, \ldots, L\}$ and average powers $\Omega_l \neq \Omega_k$ for all $k, l \in \{1, 2, 3, \ldots, L\}$. Substituting these parameters in (18) results in

$$p_Y(y) = \frac{1}{\prod_{l=1}^{L} \Omega_l} \mathrm{G}_{L,L}^{L,0}\left[\exp(-y) \,\middle|\, \begin{matrix} 1+\frac{1}{\Omega_1}, \ldots, 1+\frac{1}{\Omega_L} \\ \frac{1}{\Omega_1}, \ldots, \frac{1}{\Omega_L} \end{matrix}\right]. \tag{23}$$

Then, performing some algebraic manipulations using the Meijer's G identity given in [27, Eq. (07.34.26.0004.01)] and [27, 07.31.06.0017.01], we simplify (23) to [28, Eq. (5.8)]

$$p_Y(y) = \sum_{l=1}^{L} \left(\prod_{k \neq l} \frac{\frac{1}{\Omega_k}}{\frac{1}{\Omega_k} - \frac{1}{\Omega_l}} \right) \frac{1}{\Omega_l} \exp\left(-\frac{y}{\Omega_l}\right). \tag{24}$$

It is appropriate to mention that the steps followed in Special Case 1 and Special Case 2 can also be readily used to obtain the CDF for the same special cases.

Theorem 2 (CDF of the sum of gamma or equivalently squared Nakagami-m RVs)**.** *The CDF of Y for both integer-order as well as non-integer-order fading parameters can be closely expressed in terms of Fox H-function as*

$$P_Y(y) = 1+\prod_{l=1}^{L}\left(\frac{m_l}{\Omega_l}\right)^{m_l} \bar{\mathrm{H}}^{0,L+1}_{L+1,L+1}\left[\exp(y)\left|\begin{matrix}\Xi_L^{(1)},(1,1,1)\\ \Xi_L^{(1)},(0,1,1)\end{matrix}\right.\right], \tag{25}$$

where the coefficient sets $\Xi_k^{(1)}$ and $\Xi_k^{(2)}$ are defined earlier in (5) *and* (6) *respectively.*

Proof: In order to derive the CDF of Y, we proceed as follows.

We integrate the PDF expressed in (13) from 0 through γ and obtain the CDF for a single gamma RV, in terms of Meijer's G function, as

$$P_\gamma(\gamma) = \left(\frac{m}{\Omega}\right)^m \mathrm{G}^{m+1,0}_{m+1,m+1}\left[\exp(-\gamma)\left|\begin{matrix}\Phi_m^{(1)},1\\ \Phi_m^{(2)},0\end{matrix}\right.\right], \tag{26}$$

where the coefficient sets $\Phi_k^{(1)}$ and $\Phi_k^{(2)}$ are defined earlier in (14) and (15) respectively.

Now, performing a similar integral operation on (4), utilizing a similar explanation as presented in the proof of the PDF of the sum of gamma RVs i.e. Theorem 1 to obtain (4) from (10), and further making some simple modifications to the Mellin-Barnes integral representation to satisfy the exact definition of the Fox's $\bar{\mathrm{H}}$ function, we obtain a final closed-form result for the CDF of Y, valid for both integer-order as well as non-integer-order fading parameters, in terms of Fox's $\bar{\mathrm{H}}$ function as presented in (25). ■

Therefore, Fig. 4 and Fig. 5 present the CDF and the logarithmic CDF respectively of the output SNR obtained from the exact closed-form expression (25) and show a perfect match between this obtained closed-form analytical result and the one obtained via Monte Carlo simulations for varying $L's$ (i.e. $L = 3, 4, 5$), and their respective fixed fading parameters $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$. The logarithmic plots were selected to display the accuracy of the matched results.

Corollary 3 (CDF of the sum of gamma or equivalently squared Nakagami-*m* RVs for integer-order fading parameters)**.** *It is worth mentioning that via simple algebraic manipulations, the expression in* (25) *simplifies to*

$$P_Y(y) = \prod_{l=1}^{L}\left(\frac{m_l}{\Omega_l}\right)^{m_l} \mathrm{G}^{1+\kappa,0}_{1+\kappa,1+\kappa}\left[\exp(-y)\left|\begin{matrix}\Psi_\kappa^{(1)},1\\ \Psi_\kappa^{(2)},0\end{matrix}\right.\right] \tag{27}$$

for integer-order fading parameters where the coefficient sets $\Psi_k^{(1)}$ and $\Psi_k^{(2)}$ are defined earlier in (17) *and* (20) *respectively.*

Moreover, when the probability that the instantaneous MRC output SNR falls below a given threshold y_{th}, we encounter a situation labeled as outage and it is an important feature to study outage probability (OP) of a system. Hence, another important fact worth stating here is that the expression derived in the Corollary 3 also serves the purpose for the expression of OP of MRC diversity combining receivers based wireless communication system that is experiencing i.n.i.d. Nakagami-*m* fading channels or in other words, when the desired user is subject to Nakagami-*m* fading, the probability that the SNR falls below a predetermined protection ratio y_{th} can be simply expressed, for both integer-order as well as non-integer-order fading parameters, by replacing y with y_{th} in (25) as

$$P_{\mathrm{out}}(y_{\mathrm{th}}) = P_Y(y_{\mathrm{th}}). \tag{28}$$

Employing similar substitutions, all the other respective ex-

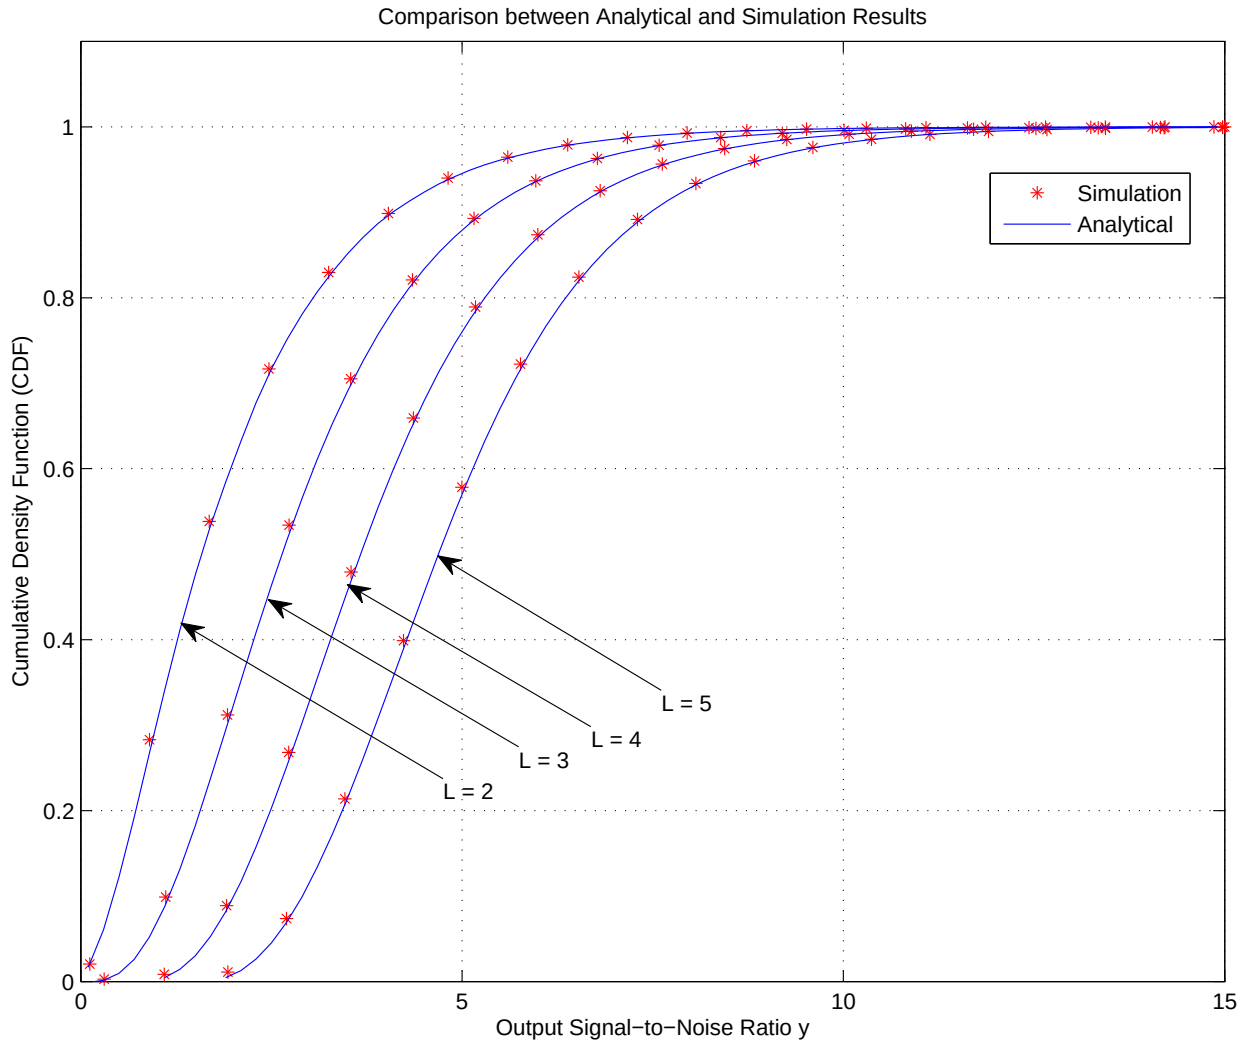

Fig. 4. Comparison between CDFs obtained analytically and via Monte Carlo simulations for varying branches L and respective fixed fading parameters for these channels as $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$.

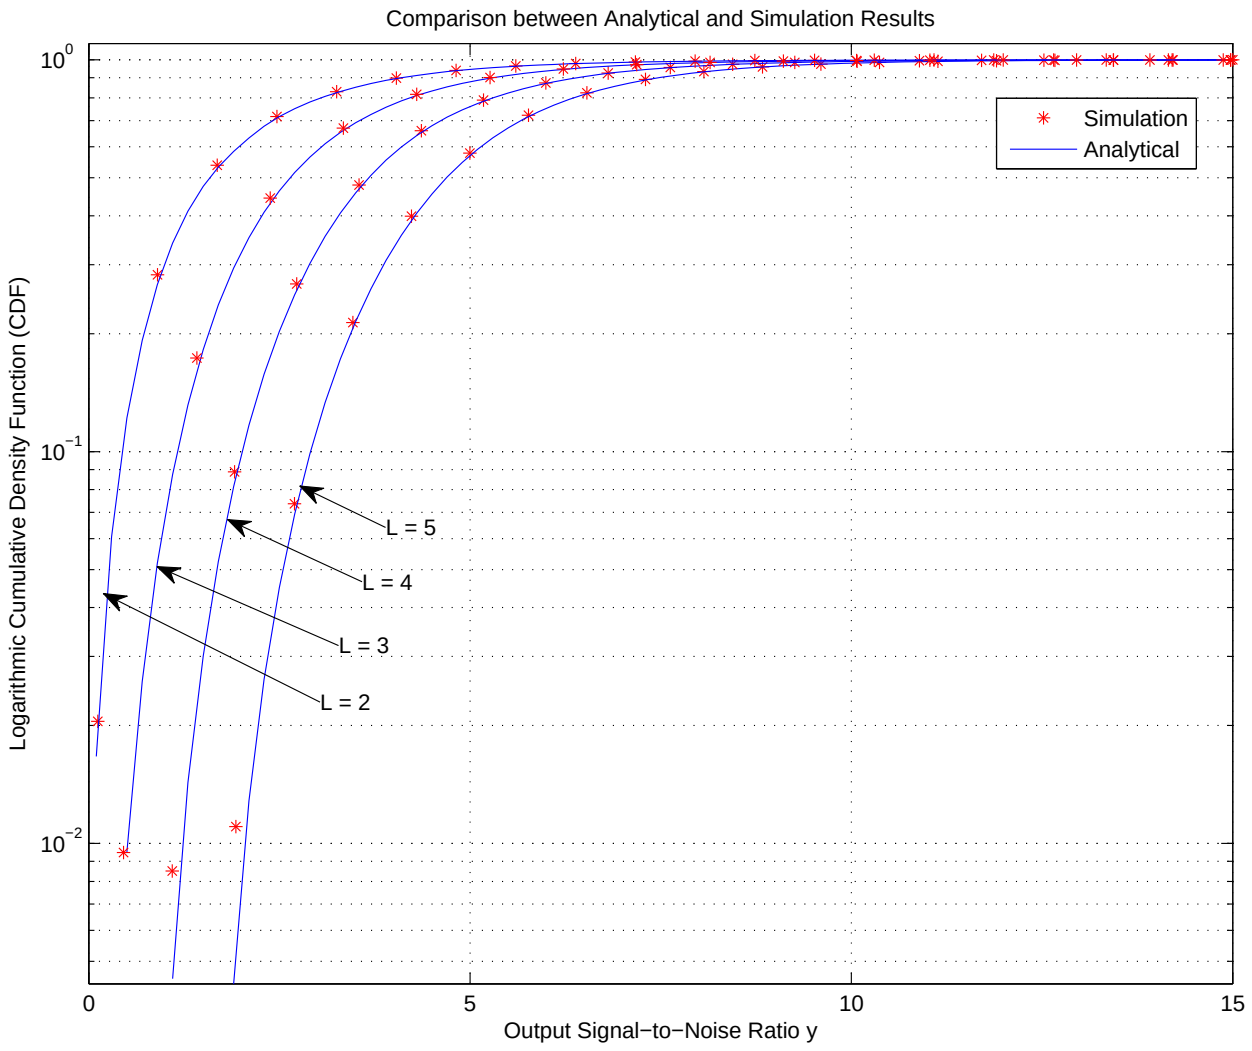

Fig. 5. Comparison between CDFs obtained analytically and via Monte Carlo simulations, on log scale, for varying branches L and respective fixed fading parameters for these channels as $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$.

TABLE III
CONDITIONAL ERROR PROBABILITY (CEP) PARAMETERS

Modulation	p	q
Binary Frequency Shift Keying (BFSK)	0.5	0.5
Binary Phase Shift Keying (BPSK)	0.5	1
Differential Phase Shift Keying (DPSK)	1	1

pressions of CDF can be utilized for OP such as replacing γ with γ_{th} in (26) and/or replacing y with y_{th} in (27).

IV. APPLICATIONS TO THE PERFORMANCE OF DIVERSITY COMBINING RECEIVER SYSTEMS

This section presents the results on the performance analysis, in particular BER analysis, of the sum of i.n.i.d. gamma variates or equivalently squared Nakagami-*m* variates. In here, we limit ourselves to binary modulation schemes.

In MRC combining scheme, all the branches are selected at the output. In our case, for a L-branch MRC diversity receiver, the signal-to-noise ratio (SNR) y, is given by

$$y = \gamma_1 + \cdots + \gamma_L. \tag{29}$$

The most straightforward approach to obtain BER P_e for MRC is to average the conditional error probability (CEP) $P_e\left(\epsilon|y\right)$ for the given SNR given by

$$P_e\left(\epsilon|y\right) = \frac{\Gamma(p, qy)}{2\Gamma(p)}, \tag{30}$$

over the PDF of the combiner output SNR [1] i.e.

$$P_e = \int_0^{\infty} P_e\left(\epsilon|y\right) p_Y\left(y\right) dy. \tag{31}$$

The expression in (30) is a unified CEP expression for coherent and non-coherent binary modulation schemes over an AWGN channel [29]. $\Gamma(\cdot,\cdot)$ is the complementary incomplete gamma function [21, Eq. (8.350.2)]. The parameters p and q in (30) account for different modulation schemes. For an extensive list of modulation schemes represented by these parameters, one may look into [30] or refer to Table III.

Theorem 3 (BER of a L-branch MRC system operating over Nakagami-*m* fading channels for binary modulation schemes)**.** *The BER of a L-branch MRC diversity combining receiver wireless communication system running over Nakagami-m fading channels, valid for both integer-order as well as non-integer-order fading parameters and for any binary modulation scheme including BFSK, BPSK, and DPSK, can be expressed in closed-form, in terms of extended Fox $\bar{H}$-function ($\hat{H}$), as*

$$P_e = \frac{q^p}{2} \prod_{l=1}^{L} \left(\frac{m_l}{\Omega_l}\right)^{m_l} \hat{\mathrm{H}}_{L+2,L+2}^{L+1,1}\left[1 \left| \begin{matrix} (1-q,1,p), \zeta_1 \\ \zeta_2, (-q,1,p) \end{matrix} \right.\right], \tag{32}$$

where

$$\zeta_1 = \Upsilon_L^{(1)}, (1,1,1), \tag{33}$$

and

$$\zeta_2 = (0,1,1), \Upsilon_L^{(2)}, \tag{34}$$

and where the coefficient sets $\Upsilon_k^{(1)}$ and $\Upsilon_k^{(2)}$, $k \in \mathbb{N}$ are defined as

$$\Upsilon_k^{(1)} = \overbrace{\left(1 + \frac{m_1}{\Omega_1}, 1, m_1\right), \ldots, \left(1 + \frac{m_k}{\Omega_k}, 1, m_k\right)}^{k\text{-bracketed terms}}, \tag{35}$$

and

$$\Upsilon_k^{(2)} = \overbrace{\left(\frac{m_1}{\Omega_1}, 1, m_1\right), \ldots, \left(\frac{m_k}{\Omega_k}, 1, m_k\right)}^{k\text{-bracketed terms}} \tag{36}$$

respectively.

Proof: Utilizing (31) by substituting (30) and (4) into it and performing some simple manipulations along with some simple rearrangements of $\Gamma(.)$ function terms, we get an exact closed-form result of the integral valid for both integer-order as well as non-integer-order fading parameters and for any binary modulation scheme including BFSK, BPSK, and DPSK, in terms of extended Fox's $\bar{\mathrm{H}}$ function ($\hat{H}$), as presented above in (32), Theorem 3. ■

Corollary 4 (BER of a L-branch MRC system operating with Nakagami-*m* integer-order fading channels for BFSK and BPSK binary modulation schemes)**.** *The above presented BER expression in* (32), *Theorem 3 is simplified, via simple algebraic manipulations, to the following closed-form expression when considering BFSK and BPSK binary modulation schemes with only integer-order fading parameters. It is represented in terms of Fox $\bar{H}$-function as*

$$P_e = \frac{q^p}{2} \prod_{l=1}^{L} \left(\frac{m_l}{\Omega_l}\right)^{m_l} \bar{\mathrm{H}}_{\kappa+2,\kappa+2}^{\kappa+1,1}\left[1 \left| \begin{matrix} (1-q,1,p), \chi_1 \\ \chi_2, (-q,1,p) \end{matrix} \right.\right], \tag{37}$$

where

$$\chi_1 = \Delta_\kappa^{(1)}, (1,1), \tag{38}$$

and

$$\chi_2 = (0,1), \Delta_\kappa^{(2)}, \tag{39}$$

and where the coefficient sets $\Delta_k^{(1)}$ and $\Delta_k^{(2)}$, $k \in \mathbb{N}$ are defined in (40) *and* (41) *respectively. K is the total number of gamma or equivalently squared Nakagami-m RVs i.e. L number of total branches for our specific wireless communication system being considered here.*

Corollary 5 (BER of a L-branch MRC system operating over Nakagami-*m* integer-order fading channels for DPSK binary modulation schemes)**.** *Further down the line, the BER expression in* (37) *is simplified, via simple algebraic manipulations, to the following closed-form expression when considering only DPSK binary modulation scheme for integer-order only fading parameters. This expression is represented in terms of Meijer G-function as*

$$P_e = \frac{q^p}{2} \prod_{l=1}^{L} \left(\frac{m_l}{\Omega_l}\right)^{m_l} \mathrm{G}_{\kappa+p+1,\kappa+p+1}^{\kappa+1,p}\left[1 \left| \begin{matrix} o_p^{(1)}, \Psi_\kappa^{(1)}, 1 \\ 0, \Psi_\kappa^{(2)}, o_p^{(2)} \end{matrix} \right.\right], \tag{42}$$

where the coefficient sets $\Psi_k^{(1)}$ and $\Psi_k^{(2)}$ are defined earlier in (17) *and* (20) *respectively, the coefficient sets $o_k^{(1)}$ and $o_k^{(2)}$,*

$$\Delta_k^{(1)} = \overbrace{\overbrace{\left(1+\frac{m_1}{\Omega_1},1\right),\ldots,\left(1+\frac{m_1}{\Omega_1},1\right)}^{m_1\text{-times}},\ldots,\overbrace{\left(1+\frac{m_K}{\Omega_K},1\right),\ldots,\left(1+\frac{m_K}{\Omega_K},1\right)}^{m_K\text{-times}}}^{k\text{-bracketed terms}}, \tag{40}$$

$$\Delta_k^{(2)} = \overbrace{\overbrace{\left(\frac{m_1}{\Omega_1},1\right),\ldots,\left(\frac{m_1}{\Omega_1},1\right)}^{m_1\text{-times}},\ldots,\overbrace{\left(\frac{m_K}{\Omega_K},1\right),\ldots,\left(\frac{m_K}{\Omega_K},1\right)}^{m_K\text{-times}}}^{k\text{-bracketed terms}} \tag{41}$$

$k \in \mathbb{N}$ *are defined as*

$$o_k^{(1)} = \overbrace{(1-q),\ldots,(1-q)}^{k\text{-times}}, \tag{43}$$

and

$$o_k^{(2)} = \overbrace{(-q),\ldots,(-q)}^{k\text{-times}} \tag{44}$$

respectively.

V. RESULTS AND DISCUSSION

The numerical results for BER of MRC diversity combining receiver scheme with L-diversity over i.n.i.d. gamma or equivalently squared Nakagami-*m* fading channels are presented in this section.

To our best knowledge, the extended Fox's $\overline{\mathrm{H}}$ function ($\hat{H}$) is not available in any standard mathematical packages. As such, we offer in Table Table IV an efficient Mathematica® implementation of this function in order to give numerical results based on (32), (37), and/or (42). With this implementation, the extended Fox's $\overline{\mathrm{H}}$ function ($\hat{H}$) can be evaluated fast and accurately. This computability, therefore, has been utilized for different digital modulation schemes and is employed to discuss the results in comparison to respective Monte Carlo simulation outcomes.

The average SNR per bit in all the scenarios discussed is assumed to be equal. In addition, different digital modulation schemes are represented based on the values of p and q where $p = 0.5$ and $q = 1$ represents BPSK, $p = 1$ and $q = 1$ represents DPSK, and BFSK is represented by $p = 0.5$ and $q = 0.5$. In Monte Carlo simulations, the gamma or equivalently squared Nakagami-*m* fading channel generation is readily available in MATLAB.

We observe from Fig. 6 that this implemented computability of extended Fox's $\overline{\mathrm{H}}$ function ($\hat{H}$) provides a perfect match to the MATLAB simulated results and the results are as expected i.e. the BER decreases as the signal-to-noise ratio (SNR) increases. Its important to note here that these values for the parameters were selected randomly to prove the validity of the obtained results and hence specific values based on the standards can be used to obtain the required results.

Furthermore, it can be seen from Fig. 6 that, as expected, BPSK outperforms the other modulation schemes and DPSK outperforms BFSK. Similar results for any other values of $m's$ can be observed for the exact closed-form BER for L-diversity i.n.i.d. gamma or equivalently squared Nakagami-*m* channels presented in this work.

TABLE IV
MATHEMATICA® IMPLEMENTATION OF THE EXTENDED FOX'S $\overline{\mathrm{H}}$ FUNCTION ($\hat{H}$)

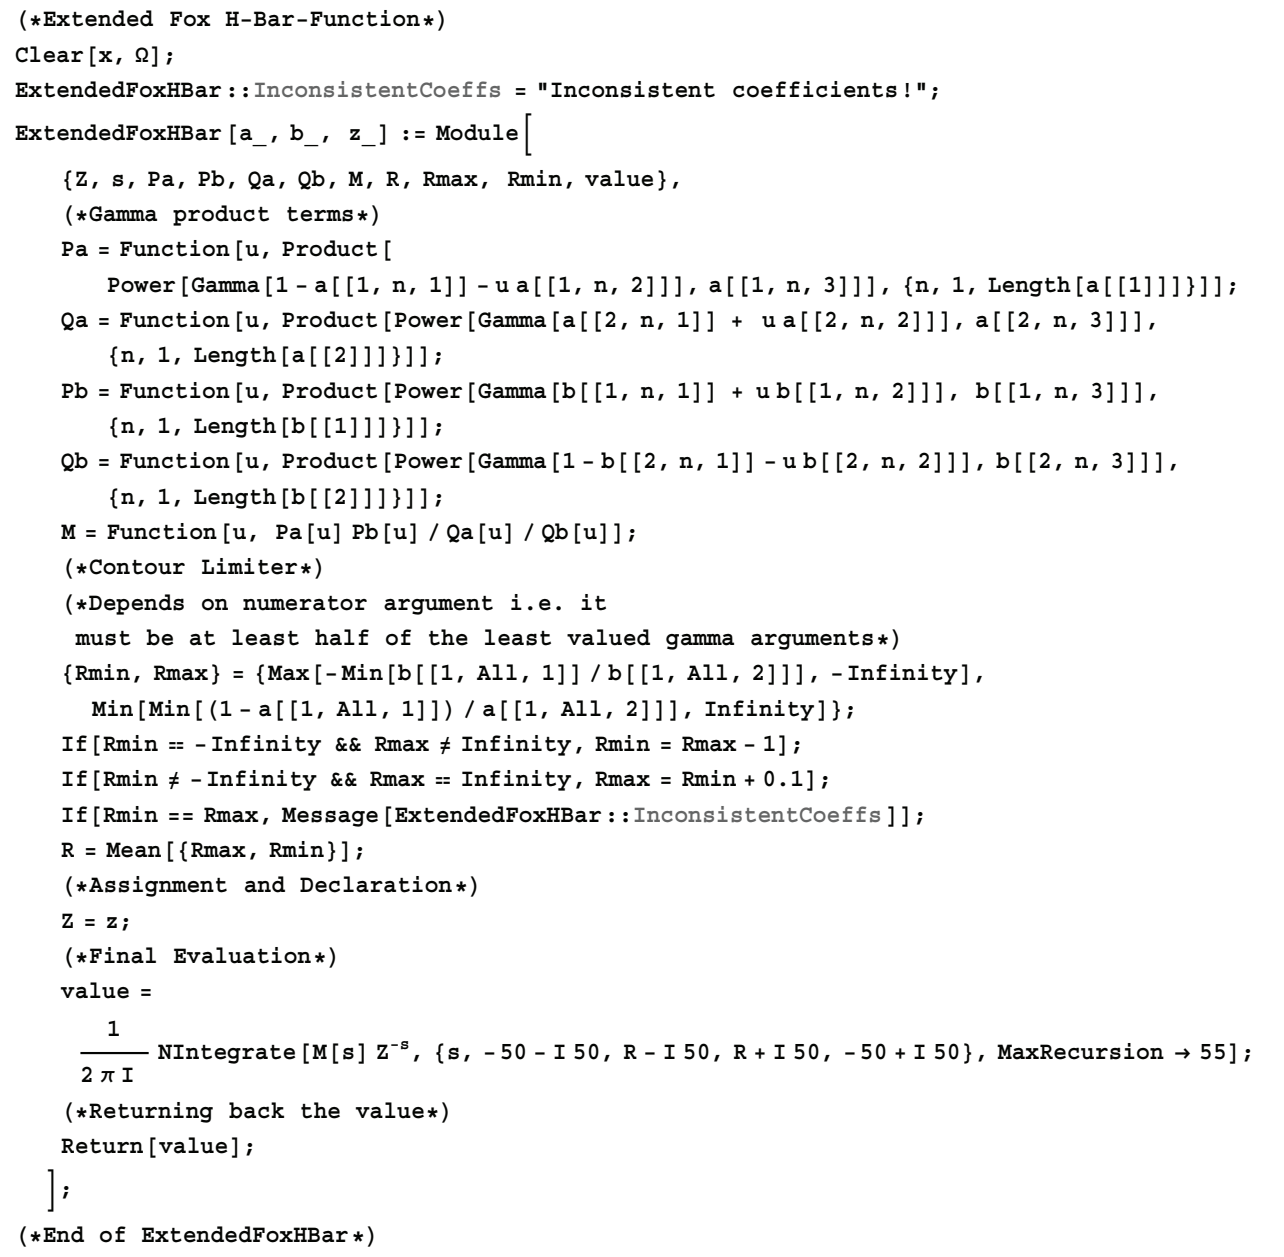

```
(*Extended Fox H-Bar-Function*)
Clear[x, Ω];
ExtendedFoxHBar::InconsistentCoeffs = "Inconsistent coefficients!";
ExtendedFoxHBar[a_, b_, z_] := Module[
   {Z, s, Pa, Pb, Qa, Qb, M, R, Rmax, Rmin, value},
   (*Gamma product terms*)
   Pa = Function[u, Product[
      Power[Gamma[1 - a[[1, n, 1]] - u a[[1, n, 2]]], a[[1, n, 3]]], {n, 1, Length[a[[1]]]}]];
   Qa = Function[u, Product[Power[Gamma[a[[2, n, 1]] + u a[[2, n, 2]]], a[[2, n, 3]]],
      {n, 1, Length[a[[2]]]}]];
   Pb = Function[u, Product[Power[Gamma[b[[1, n, 1]] + u b[[1, n, 2]]], b[[1, n, 3]]],
      {n, 1, Length[b[[1]]]}]];
   Qb = Function[u, Product[Power[Gamma[1 - b[[2, n, 1]] - u b[[2, n, 2]]], b[[2, n, 3]]],
      {n, 1, Length[b[[2]]]}]];
   M = Function[u, Pa[u] Pb[u] / Qa[u] / Qb[u]];
   (*Contour Limiter*)
   (*Depends on numerator argument i.e. it
    must be at least half of the least valued gamma arguments*)
   {Rmin, Rmax} = {Max[-Min[b[[1, All, 1]] / b[[1, All, 2]]], -Infinity],
     Min[Min[(1 - a[[1, All, 1]]) / a[[1, All, 2]]], Infinity]};
   If[Rmin == -Infinity && Rmax ≠ Infinity, Rmin = Rmax - 1];
   If[Rmin ≠ -Infinity && Rmax == Infinity, Rmax = Rmin + 0.1];
   If[Rmin == Rmax, Message[ExtendedFoxHBar::InconsistentCoeffs]];
   R = Mean[{Rmax, Rmin}];
   (*Assignment and Declaration*)
   Z = z;
   (*Final Evaluation*)
   value =
     1
    ──── NIntegrate[M[s] Z^-s, {s, -50 - I 50, R - I 50, R + I 50, -50 + I 50}, MaxRecursion → 55];
    2 π I
   (*Returning back the value*)
   Return[value];
  ];
(*End of ExtendedFoxHBar*)
```

VI. CONCLUDING REMARKS

We derived novel closed-form expressions for the PDF and the CDF of the sum of i.n.i.d. gamma or equivalently squared Nakagami-*m* RVs in the case of both integer-order as well as non-integer-order fading figure parameters. An interesting finding is that these expressions can be written in terms of special functions, specifically Fox's $\overline{\mathrm{H}}$ function distributions. Based on these statistical formulas obtained, and following the exact PDF-based approach, we analyzed the performance of a MRC diversity combining receiver based wireless communication system operating over i.n.i.d. Nakagami-fading channels and important performance metrics such as OP and BER were expressed in closed form and hence this serves as the key feature along side the novel statistical derivations of PDF and CDF.

An exact closed-form expression for the BER performance of different binary modulations with L-branch MRC scheme

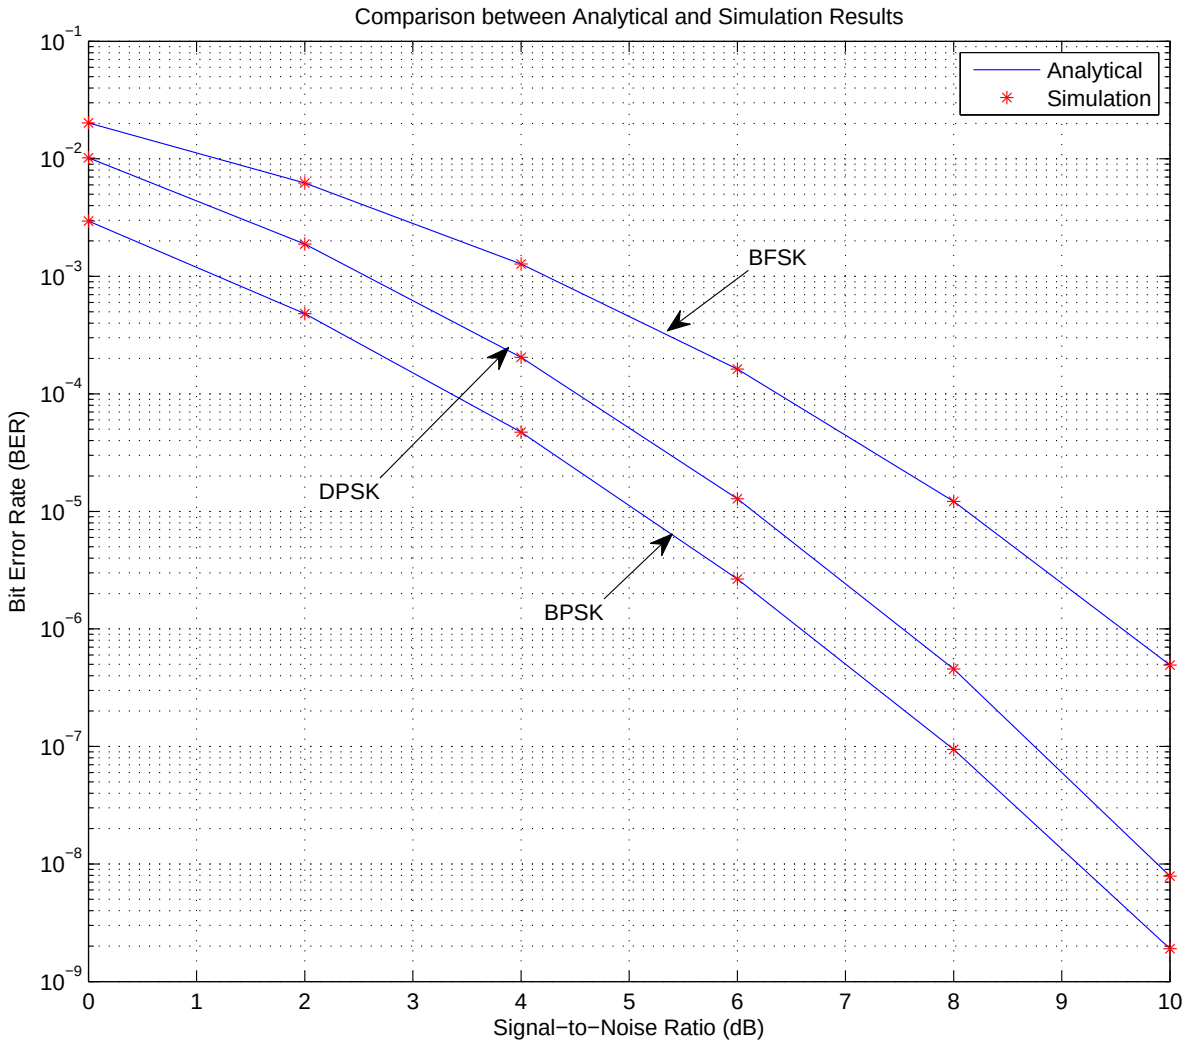

Fig. 6. Average BER of BPSK over i.n.i.d. gamma or equivalently squared Nakagami-*m* fading channels with $L = 5$-branch MRC and fading parameters for these channels as $m_1 = 0.6$, $m_2 = 1.1$, $m_3 = 2$, $m_4 = 3.4$, and $m_5 = 4.5$.

over i.n.i.d. gamma or equivalently squared Nakagami-*m* fading channels was derived. The analytical calculations were done utilizing a general class of special functions including Meijer's G function, Fox's $\overline{\text{H}}$ function, and extended Fox's $\overline{\text{H}}$ function ($\hat{H}$). In addition, this work presents numerical examples to illustrate the mathematical formulation developed in this work and to show the effect of the fading severity and unbalance on the system performance.

Our results improve on previously published results that are either in the form of infinite sums or higher order derivatives of the fading parameter or recursive solutions. This approach provides a novel closed-form expression as compared to earlier work in the literature. Having the computability for these functions such as Fox H-function and extended Fox's $\overline{\text{H}}$ function ($\hat{H}$) and/or the decomposition of these functions into univariate Meijer's G function, this approach will form the basis for further analysis in similar proceedings.

ACKNOWLEDGMENT

We would like to thank King Abdullah University of Science and Technology (KAUST), Thuwal, Makkah Province, Saudi Arabia for providing support and resources respectively for this research work.

REFERENCES

[1] M. K. Simon and M.-S. Alouini, *Digital Communication over Fading Channels*, 2nd ed. Hoboken, New Jersey, USA: IEEE: John Wiley & Sons, Inc., 2005.

[2] D. G. Brennan, "Linear diversity combining techniques," *Proceedings of the IRE*, vol. 47, no. 6, pp. 1075–1102, Jun. 1959.

[3] ——, "Linear diversity combining techniques," *Proceedings of the IEEE*, vol. 91, no. 2, pp. 331–356, Feb. 2003.

[4] M. Nakagami, "The *m*-distribution-a general formula of intensity distribution of rapid fading," *Statistical Methods in Radio Wave Propagation*, pp. 3–36, 1960.

[5] M.-S. Alouini and A. Goldsmith, "Capacity of Nakagami multipath fading channels," in *Proceedings of IEEE Vehicular Technology Conference (VTC), 1997*, vol. 1, Phoenix, AZ, USA, May 1997, pp. 358–362.

[6] M.-S. Alouini, A. Abdi, and M. Kaveh, "Sum of gamma variates and performance of wireless communication systems over Nakagami-fading channels," *IEEE Transactions on Vehicular Technology*, vol. 50, no. 6, pp. 1471–1480, Nov. 2001.

[7] I. S. Ansari, S. Al-Ahmadi, F. Yilmaz, M.-S. Alouini, and H. Yanikomeroglu, "A new formula for the BER of binary modulations with dual-branch selection over generalized-*K* composite fading channels," *IEEE Transactions on Communications*, vol. 59, no. 10, pp. 2654–2658, Oct. 2011.

[8] M. Xia, C. Xing, Y.-C. Wu, and S. Aissa, "Exact performance analysis of dual-hop semi-blind af relaying over arbitrary Nakagami-*m* fading channels," *IEEE Transactions on Wireless Communications*, vol. 10, no. 10, pp. 3449–3459, Oct. 2011.

[9] G. K. Karagiannidis, N. C. Sagias, and T. A. Tsiftsis, "Closed-form statistics for the sum of squared Nakagami-*m* variates and its applications," *IEEE Transactions on Communications*, vol. 54, no. 8, pp. 1353–1359, Aug. 2006.

[10] A. M. Mathai, "Storage capacity of a dam with gamma type inputs," *Annals of Institute of Statistical Mathematics*, vol. 34(3), no. A, pp. 591–597, 1982.

[11] P. G. Moschopoulos, "The distribution of the sum of independent gamma random variables," *Annals of Institute of Statistical Mathematics*, vol. 37, no. A, pp. 541–544, 1985.

[12] V. A. Aalo, "Performance of maximal-ratio diversity systems in a correlated Nakagami-fading environment," *IEEE Transactions on Communications*, vol. 43, no. 8, pp. 2360–2369, Aug. 1995.

[13] V. A. Aalo, T. Piboongungon, and G. P. Efthymoglu, "Another look at the performance of MRC schemes in Nakagami-*m* fading channels with arbitrary parameters," *IEEE Transactions on Communications*, vol. 53, no. 12, pp. 2002–2005, Dec. 2005.

[14] G. P. Efthymoglu, T. Piboongungon, and V. A. Aalo, "Performance of DS-CDMA receivers with MRC in Nakagami-*m* fading channels with arbitrary parameters," *IEEE Transactions on Vehicular Technology*, vol. 55, no. 1, pp. 104–114, Jan. 2006.

[15] P. Lombardo, G. Fedele, and M. M. Rao, "MRC performance for binary signals in Nakagami fading with general branch correlation," *IEEE Transactions on Communications*, vol. 47, no. 1, pp. 44–52, Jan. 1999.

[16] Q. T. Zhang, "Exact analysis of postdetection combiing for DPSK and NFSK systems over arbitrarily correlated Nakagami channels," *IEEE Transactions on Communications*, vol. 46, no. 11, pp. 1459–1467, Nov. 1988.

[17] A. M. Mathai and R. M. Saxena, *The H-Function with Applications in Statistics*. New York: Wiley Halsted, 1978.

[18] R. K. Saxena, "Functional relations involving generalized *H*-function," *Le Matematiche*, vol. 53, no. 1, pp. 123–131, 1998.

[19] R. G. Buschman and H. M. Srivastave, "The $\bar{H}$ function associated with a certain class of Feynman integrals," *Journal of Physics A: Mathematical and General*, vol. 23, pp. 4707–4710, 1990.

[20] A. M. Mathai, R. M. Saxena, and H. J. Haubold, *The H-Function*. New York Dordrecht Heidelberg London: Springer, 2010.

[21] I. S. Gradshteyn and I. M. Ryzhik, *Table of Integrals, Series and Products*. New York: Academic Press, 2000.

[22] M. Abramowitz and I. A. Stegun, *Handbook of Mathematical Functions*, 10th ed. New York: Dover, Dec. 1972.

[23] B. Davies, *Integral Transforms and Their Applications*, 3rd ed., ser. Applied Mathematical Sciences. Springer, 2002.

[24] R. B. Paris and D. Kaminski, *Asymptotics and Mellin-Barnes Integrals*, 1st ed. Cambridge University Press, 2001.

[25] F. Yilmaz and M.-S. Alouini, "Product of the powers of generalized Nakagami-m variates and performance of cascaded fading channels," in *Proceedings of IEEE Global Telecommunications Conference, 2009. (GLOBECOM 2009)*, Honolulu, Hawaii, US, Nov.-Dec. 2009, pp. 1–8.

[26] ——, "Outage capacity of multicarrier systems," in *Proceedings of 2010 IEEE* 17^{th} *International Conference on Telecommunications (ICT)*, Doha, Qatar, Apr. 2010, pp. 260–265.

[27] I. Wolfram Research, *Mathematica Edition: Version 8.0*. Champaign, Illinois: Wolfram Research, Inc., 2010.

[28] S. M. Ross, *Introduction to Probability Models*, 10th ed. US: Academic Press, Dec. 2009.

[29] A. H. Wojnar, "Unknown bounds on performance in Nakagami channels," *IEEE Transactions on Communications*, vol. 34, no. 1, pp. 22–24, Jan. 1986.

[30] N. C. Sagias, D. A. Zogas, and G. K. Kariaginnidis, “Selection diversity receivers over nonidentical Weibull fading channels,” *IEEE Transactions on Vehicular Technology*, vol. 54, no. 6, pp. 2146–2151, Nov. 2005.